


SPECK X
pumps

NEW

High-performance design ...

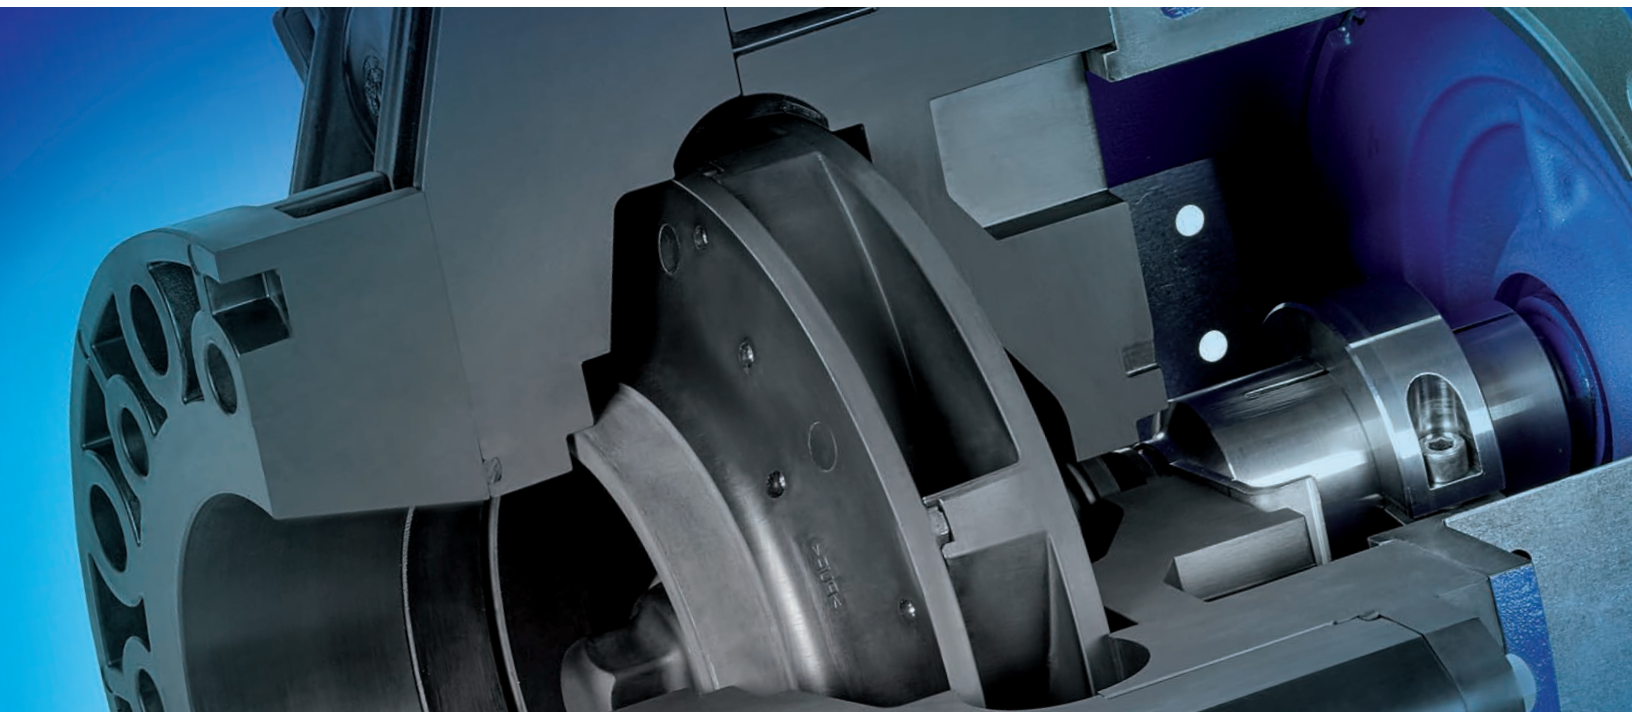


BADU[®] Block Multi Series **Normblock Multi Series**

All Plastic Commercial Pool Pump 1750 RPM

BADU® Block Multi Series Normblock Multi Series

QUIET & EFFICIENT SUPERIOR DESIGN

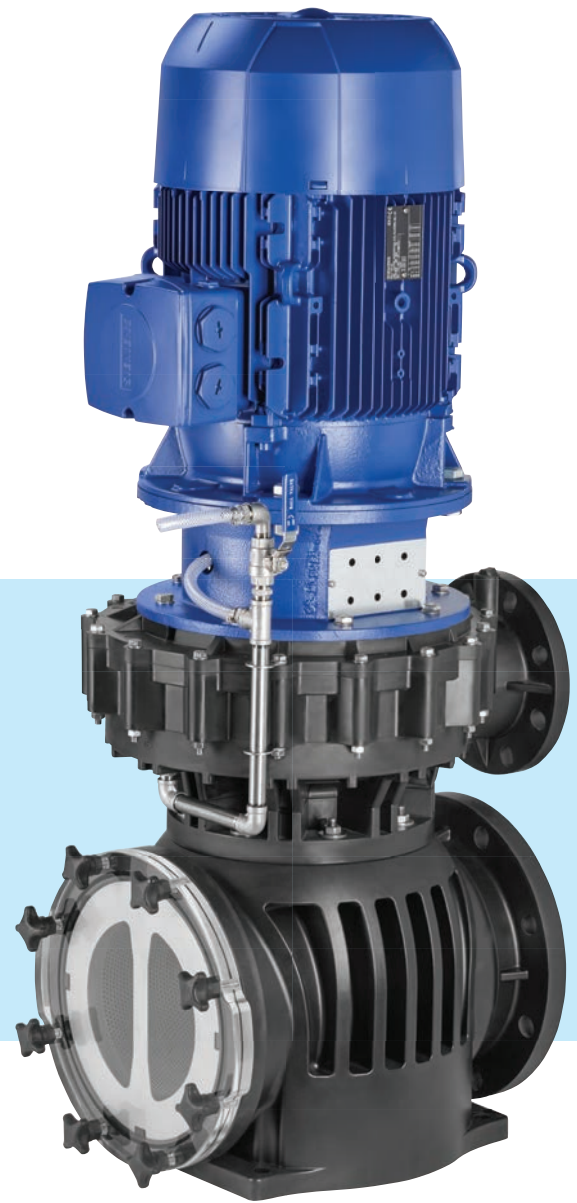


Normblock Multi Series

DESIGN

This pump has a robust horizontal single stage design.

APPLICATION

Ideally suited for aquatic facilities, fountains, water parks, cruise ships and pools with elevated salt concentration. Perfect for aquaculture.

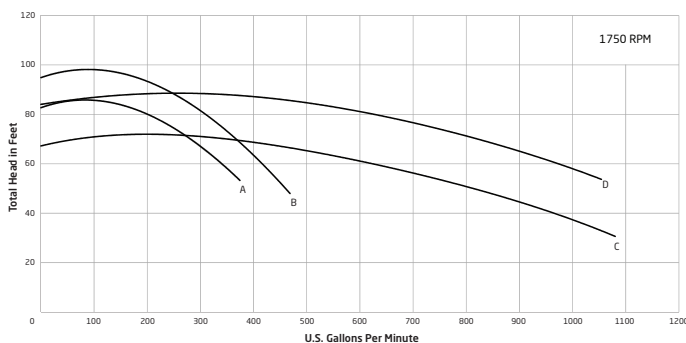

A. 65/250 (Ø 225mm) - 7.5 HP S.F. 1.25
B. 65/250 (Ø 240mm) - 10 HP S.F. 1.25

C. 100/250 (Ø 220mm) - 15 HP S.F. 1.25
D. 100/250 (Ø 240mm) - 20 HP S.F. 1.00

BADU Block Multi Series

DESIGN

- This pump has a vertical design that creates impressive performance while saving space thereby reducing construction costs.
- All plastic strainer tank with stainless steel basket. Optional plastic basket and plastic air bleed available for fish farming and aquaculture with higher brine concentration.
- Each pump is equipped with outside circulation/air bleed piping, and includes an air valve, for automatic and manual air bleeding resulting in a long life of the mechanical seal.

APPLICATION

Ideally suited for aquatic facilities, fountains, water parks, cruise ships and pools with elevated salt concentration. Perfect for aquaculture.

NEW

The German-engineered BADU® Block Multi Series and Normblock Multi Series pumps are designed to run at 1750 rpm providing efficient, quiet operation. The new all-plastic housing is corrosion resistant, delivering long life and dependable performance ... hallmarks of Speck Pumps technology.



The housing is made of high performance plastic (THP), corrosion resistant without elaborate internal coating and can be used with higher brine concentrations.

The closed impellers are individually balanced, providing smooth running conditions and guarantee a long operation life of the entire pump assembly.

Heavy-duty energy efficient totally enclosed fan cooled (TEFC) motor, Class F insulation, protection class IP 55. Sealed ball bearings need no lubrication.

Stainless steel shaft with 316 stainless steel protective shaft sleeve.

FEATURES

- Superior slow (1750 rpm) running design reduces vibrations resulting in quiet operation.
- After installation, the discharge connection can be rotated freely (a major advantage at the construction site).
- The motor can be replaced without disassembling the pump. This design allows for the mechanical seal to remain in place.
- A wear-resistant and rugged SIC/SIC – HNBR mechanical seal allows for a long life and long maintenance intervals.
- The pump comes with a full 12 month warranty.
- Every pump is tested to factory & customer's specifications.


Please Note: The noise level from both the motor and pump are greatly influenced by how they are installed. Consideration should be given to minimize vibration and noise transmission.



Optional integrated NEMA 4X Speck/Vacon X5

Optional all plastic strainer tank for horizontal flooded suction applications

WE BRING WATER TO LIFE™

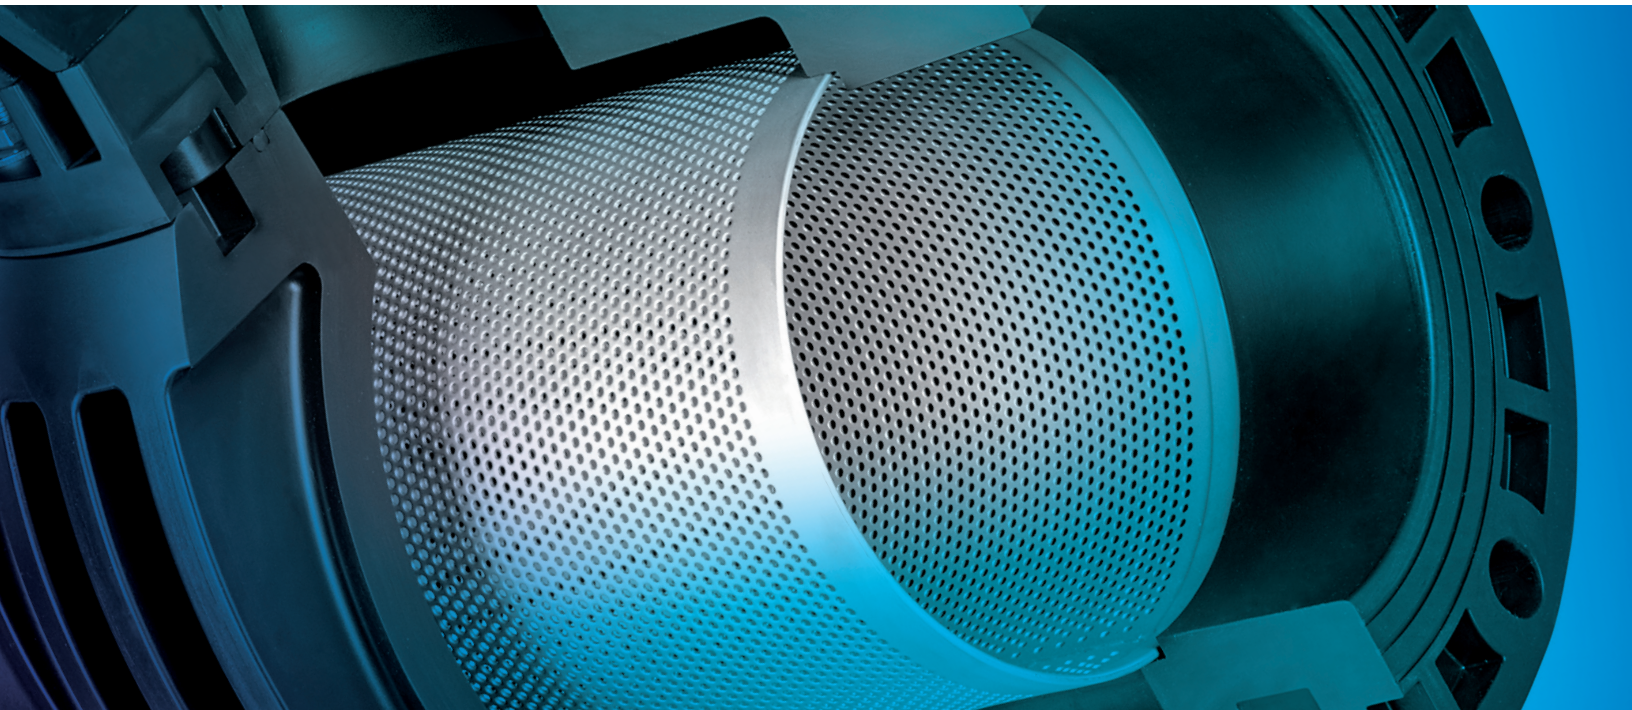

SPECK 
pumps

8125 Bayberry Road
Jacksonville, FL 32256 USA

info.usa@speck-pumps.com
www.speck-pumps.com

Toll Free 800.223.8538
Phone 904.739.2626
Fax 904.737.5261

